

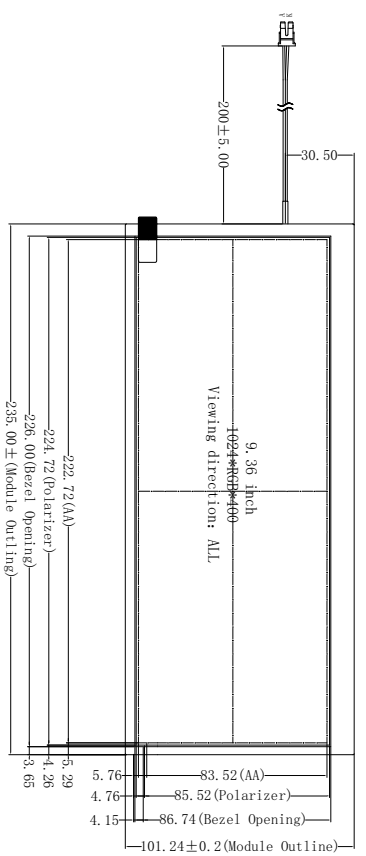


PIN	NAME	PIN	NAME
1	AGND	31	PIND0
2	AVDD	32	GND
3	DVDD	33	NO_LDR
4	GND	34	GRB
5	VCOM	35	STRB
6	DVDD	36	NC
7	GND	37	DVDD
8	NC	38	NC
9	NC	39	AGND
10	NC	40	AVDD
11	NC	41	VCOM
12	NC	42	DITH
13	NC	43	DITH
14	NC	44	DVDD
15	GND	45	GND
16	NO_LDR	46	NC
17	GND	47	NC
18	PIND3	48	NC
19	PIND3	49	NC
20	GND	50	NC
21	PINC	51	NC
22	NINC	52	NC
23	GND	53	GND
24	PIND2	54	DVDD
25	NIND2	55	SELB
26	GND	56	VGH
27	PIND1	57	DVDD
28	NIND1	58	VGL
29	GND	59	GND
30	PIND0	60	NC

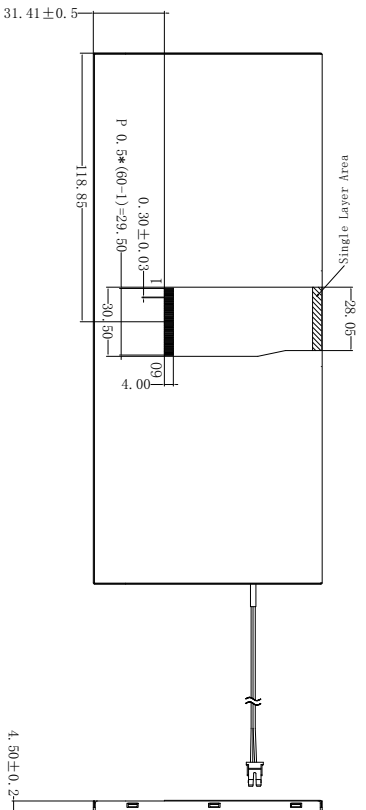

- NOTES:
1. DISPLAY TYPE: 9.36 inch TFT-LCD, TRANSMISSIVE, NORMAL BLACK
 2. OPERATING TEMP: -20° C~60° C
 3. STORAGE TEMP: -30° C~70° C
 4. VIEWING DIRECTION: ALL
 5. BACK LIGHT Uniformity: 75% (Min)
 6. Luminous intensity (9 AVG):
VF: 18V (Min); 19.5V (Typ); 21V (Max); IF: 140mA (Fix)
 7. GENERAL TOLERANCE: ±0.2



项目	Item	符号	Symbol	最小值	Min.	典型值	Typ.	最大值	Max.	单位	Condition
主屏	Main screen	亮度	Luminance	—	—	600	—	—	—	cd/m ²	7并6串; 140mA
		均匀性	Uniformity	—	—	75	—	—	—	%	
		色度坐标	Colour Coordinate	X	0.265	—	—	0.315	—		(恒定电流测试)
				Y	0.27	—	—	0.32	—		
		正向电压	Forward Voltage	VF	—	—	3.0	—	—	V	
		工作温度	Operating Temperature Range	Topr	-30	—	—	70	—	°C	
		贮存温度	Storage Temperature Range	Tstg	-40	—	—	80	—	°C	

修改内容

标记	修改者	修改日期	SCALE: FIT
△1	张文通	2019-5-27	SHEET: 1 OF 5

KAO 东莞市科傲光电有限公司
D00G GUAN KAO ELECTRONICS CO., LTD

GENERAL TOL:	UNIT	DATE	MODEL NUMBER	PROTECTION	PART NO:
±0.2	mm		KA0-094HE-RD05		KA0-094HE-RD05

APP:	CHK:	DWN:	DATE	BY	SCALE	THIS DRAWING
			2017-08-19			

1	2	3	4	5	6
Product 7.1 inch to 9.36 inch					ASSY