
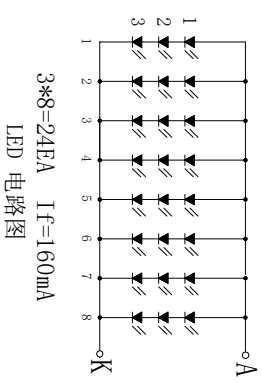


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	2017-9-5

PN	NAME	PN	NAME
1	VCOM	21	PN03
2	VDD	22	GND
3	VDD	23	NC
4	NC	24	NC
5	RESET	25	GND
6	STRB	26	NC
7	GND	27	DIM0
8	MIND0	28	SELB
9	PN00	29	AVDD
10	GND	30	GND
11	MIND1	31	LED-
12	PN01	32	LED-
13	GND	33	SHLR
14	MIND2	34	UPDN
15	PN02	35	VGL
16	GND	36	NC
17	MIND	37	NC
18	PN0C	38	VGH
19	GND	39	LED+
20	MIND3	40	LED+

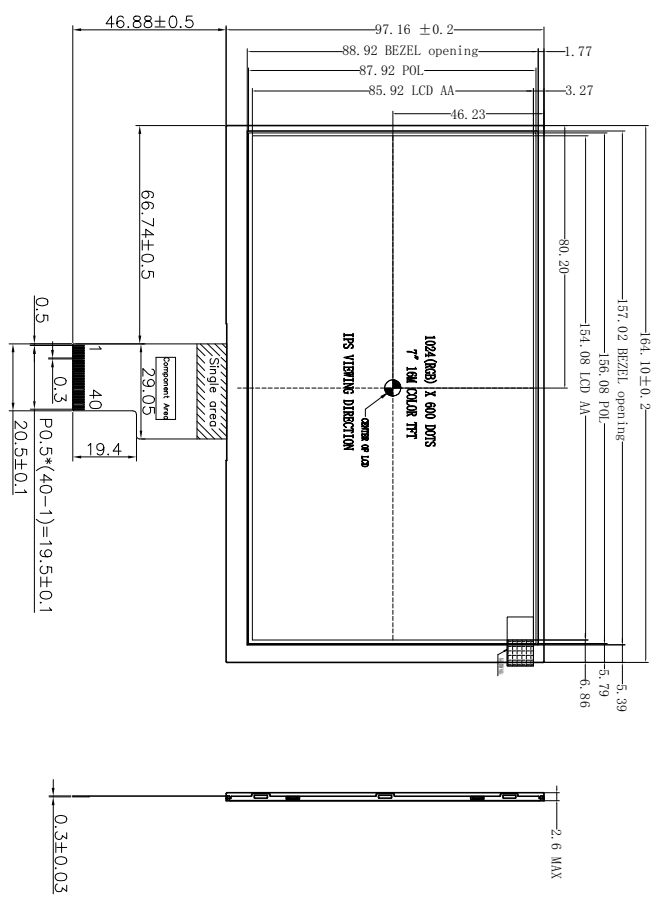

项目	Item	符号	Symbol	最小值	Min.	典型值	Typ.	最大值	Max.	单位	Condition
主屏	Main screen	Lv	—	—	300	—	—	—	—	cd/m ²	8并3串: 160mA (恒定电流测试)
均匀性	Uniformity	Avg	X	0.265	—	0.315	—	—	—	%	
色度坐标	Colour Coordinate	X	Y	0.27	—	0.32	—	—	—		
正向电压	Forward Voltage	Vf	—	—	3.0	—	—	—	—	V	
工作温度	Operating Temperature Range	Topr	—	-30	—	70	—	—	—	°C	
贮存温度	Storage Temperature Range	Tstg	—	-40	—	80	—	—	—	°C	

- NOTES:
1. DISPLAY TYPE: TFT-LCD, TRANSMISSIVE, NORMAL BLACK
 2. OPERATING TEMP: -20° C~60° C
 3. STORAGE TEMP: -30° C~70° C
 4. VIEWING DIRECTION: ALL
 5. BACK LIGHT Uniformity: 75% (Min)
 6. Luminous intensity (9 AVG):
VF: 8.2V (Min); 9.2V (Typ); 10.5V (Max); IF: 160mA (Fix)
 7. GENERAL TOLERANCE: ±0.2

修改内容	修改者	修改日期	SCALE: FIT
根据客户要求修改背光定位线, 修改FPC尺寸, FPC重新改PCB资料	张文通	2019-5-27	SHEET: 1 OF 5
修改连接器泡棉厚度	张文通	2019-5-28	GENERAL TOL: ±0.2
			UNIT mm
			APPROVALS
			DATE
			MODEL NUMBER
			PROTECTION
			PART NO:
			KA0-070BE-WS08.2
			ASSY

KAO 东莞市凯傲光电有限公司
D00G GUAN KAO ELECTRONICS CO., LTD

1	2	3	4	5	6
---	---	---	---	---	---