
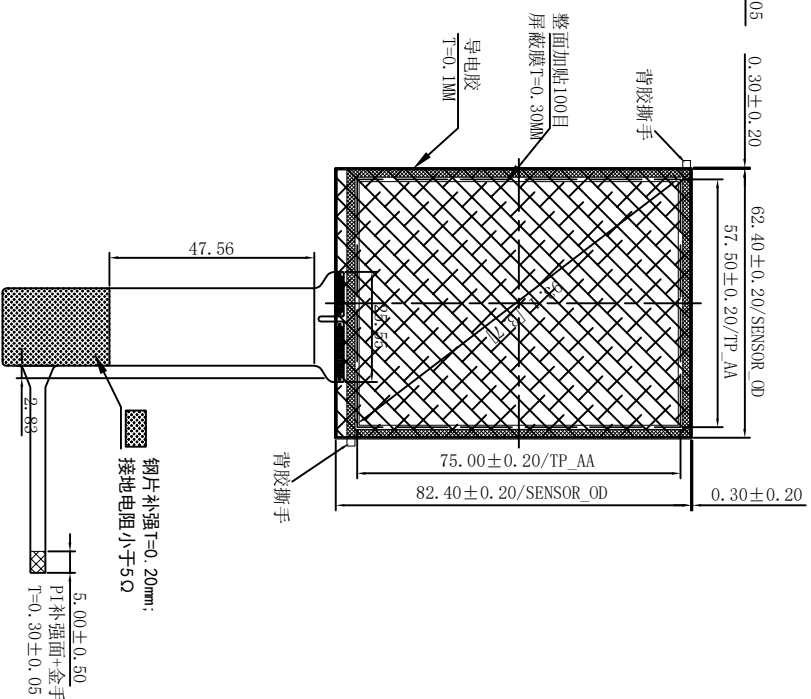
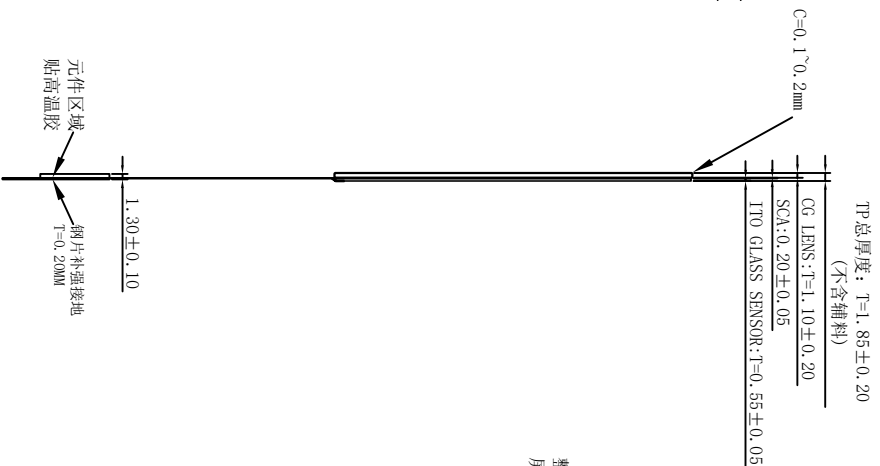


# Front View

# Side View

# Back View

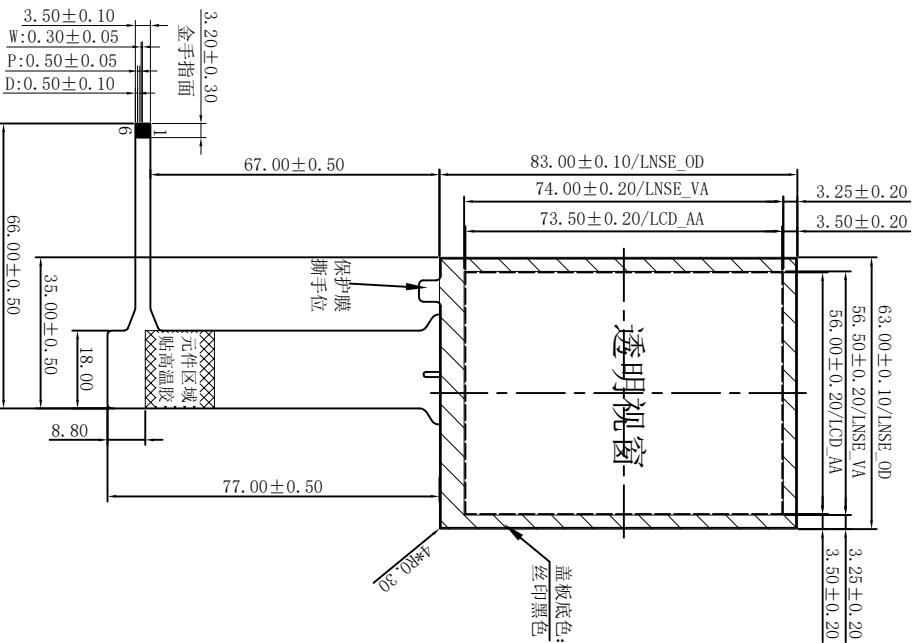

## 技术参数:

1. 接口界面: IIC;
2. 支持操作: 5指触摸;
3. 表面硬度: 28H;
4. 工作环境: -20°C~+70°C;
5. 储存环境: -30°C~+80°C;
6. 透光率: ≥85%;
7. 结构类型: Glass+ITO Glass;
8. 出线方式: FPC出线(金手指镀金);
9. 所用材料均符合ROHS标准;
10. 封装IC: GT911;
11. 未注公差: ±0.20mm;

Front View

Back View

COVER GLASS: 1.1MM (旭硝子)
贴合胶 SCA: 0.2MM
ITO GLASS: 0.55MM (南玻)

SCL/SDA槽  
加上拉电  
阻

## 12C PIN ASSIGNMENT

PIN	FUNCTION
1	SCL 3.3V
2	SDA 3.3V
3	GND
4	RESET_3.3V
5	INT 3.3V
6	VDD 3.3V

REV	MARK	HISTORY	DATE	NAME	CUSTOMER NUMBER:	DESIGN	DATE	DATE	SHEET	UNIT	SCALE	INCH	1st ANGLE PROJECT
REV.3	3				3.5寸GTP	GYC0457GG035V0.1	2020-10-21	2020-10-21	1 of 1	mm	1 : 1	3.5寸	
REV.2	2												
REV.1	1												
REV.0	0												
MARK													

GYTouch  
客户名称: 深圳市卓尔电子科技有限公司

DESIGN: Kevin  
DATE: 2020-10-21

DATE: 2020-10-21

Andy  
DATE: 2020-10-21