由 Autodesk 教育版产品制作

Hardware specification:

Touch point	10 points	TFT resolution	
I2C communication voltage		VDD supply voltage	
IIC communication address		origin of coordinate	Upper Left

Customer's confirmation:

标记(mark)	修改内容(revised contents)	签名(signature)	日期(Date)
<1>			
<2>			
<3>			
<4>			
<5>			

电容屏可支持USB接口与IIC接口，但不可同时使用。

For IIC Connector		For USB Connector	
1	VCC/3.3V	1	VCC(5V)
2	SCL	2	D-
3	SDA	3	D+
4	INT	4	GND
5	GND	5	GND
6	RESET		

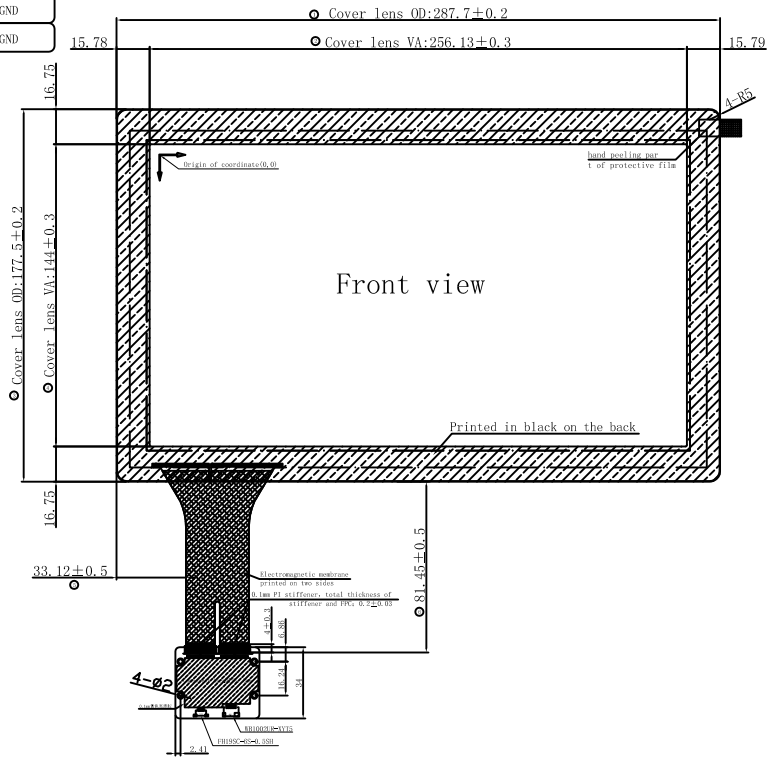

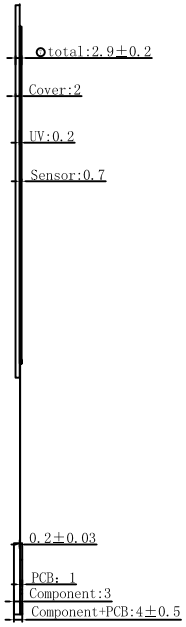

side view

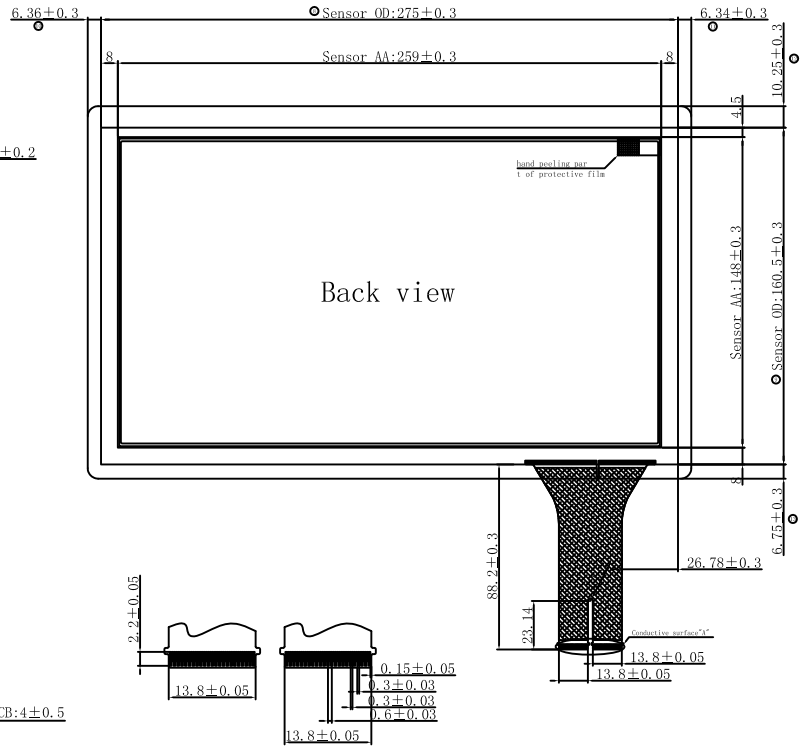

A 3:1

Technical parameters:

1. TP Structure: G+G;
2. TP Type: COF, IC controller: ILI2302M;
   Working voltage:USB(5V);
3. Light transmittance: ≥85%;
4. Surface hardness: more than 7H;
5. Working environment: -10℃~+60℃, ≤85%RH;
6. Storage environment: -10℃~+65℃, ≤85%RH;
7. Tolerance of those parts without any notes: + / - 0.3 mm;
8. Products comply with RoHS standard.
9. ①~⑬ Points need special quality control.

Touch Panel Structure

TOP		
------Cover		2.0mm
------UV		0.2mm
------ITO		
------Sensor glass	}	0.7mm
------ITO		
BOTTOM		

TITLE: 产品编号	CP-116C4607 11.6inch Engineering drawing				
Designed By: 设 计	Eddie Xu	Customerid: 客户编号		View: 投影方式	
Checked By: 审 核		Unit: 单 位	mm		
Approved By: 批 准		Date: 日 期	2016.8.10	Scale: 比 例	1:1

由 Autodesk 教育版产品制作