
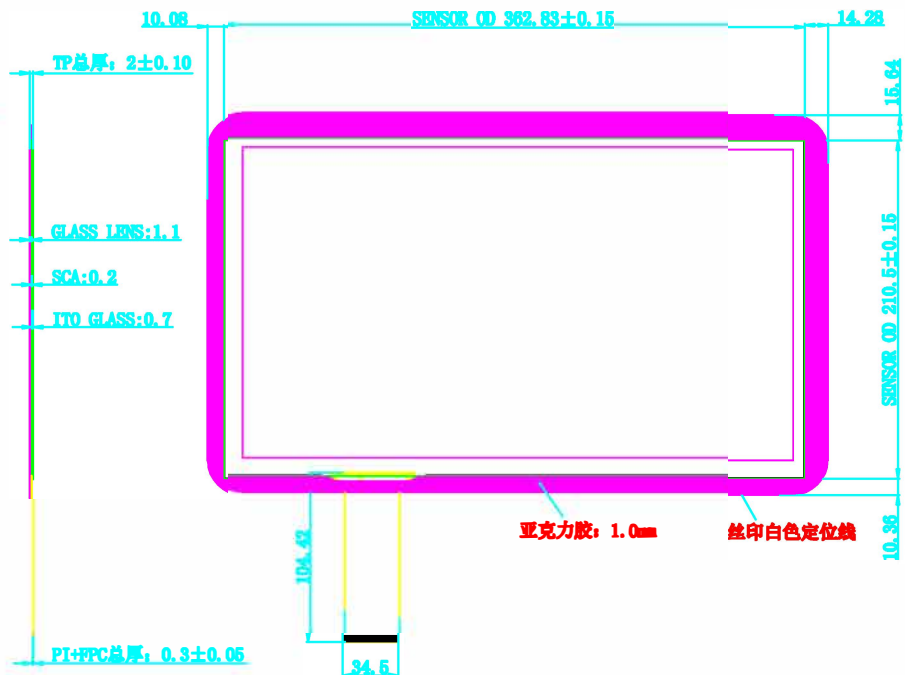


REV.	MARK	HISTORY	DATE	NAME
REV. 0	—	—	2016. 05. 23	LI

TOP VIEW

SIDE VIEW

BACK VIEW

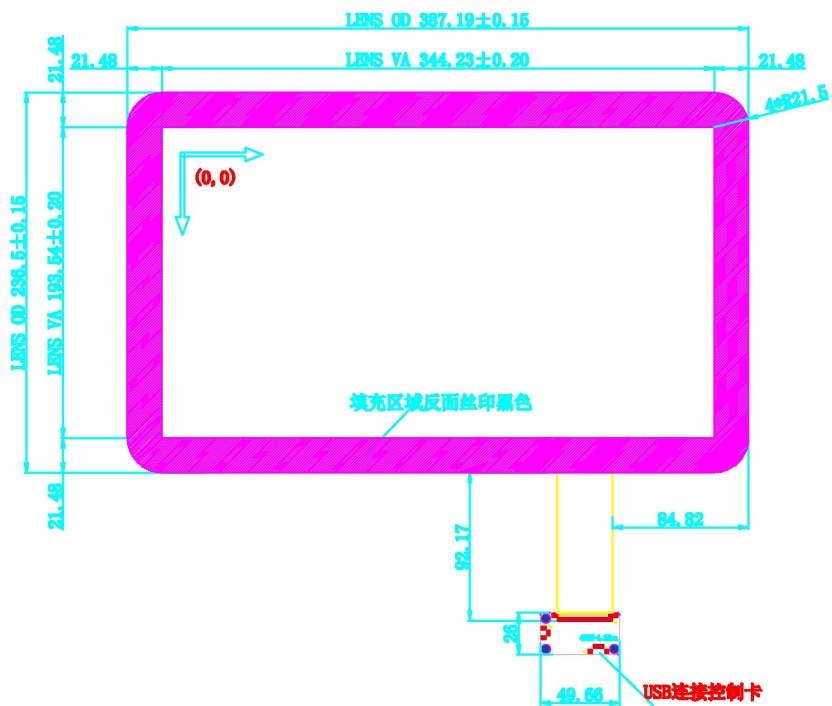

技术参数:

1. TP结构: G+G;
2. TP类型: COB; IC选用: ILI2511, 41*23
工作电压: 5V
3. 透光率: ≥85%
4. 表面硬度: 6H以上
5. 工作环境: -10℃~+60℃, ≤85%RH
6. 储存环境: -20℃~+70℃, ≤85%RH
7. 未注尺寸公差按±0.5mm
8. 产品符合RoHS标准.

J1 (USB通讯)		J2 (I2C通讯)	
PIN	定义	PIN	定义
1	VDD/5V	1	I2T
2	D-	2	VDD
3	D+	3	GND
4	GND	4	INT
		5	SCL 2.3V
		6	SDA 2.3V

CP-156AK5C007-C				SHEET	UNIT	SCALE	1st ANGLE PROJECTION
				1 of 1	mm	1 : 1	
DESIGN		DATE					
DESIGN		DATE					