



- Instruction:
1. Type: Film to Glass
  2. Operating Voltage: 37 V
  3. Response Time: <10ms
  4. Storage Temperature: -20 °C~+70 °C
  5. Operation Temperature/Humidity: -10 °C~+60 °C / 20%~95%
  6. Hitting Life: >10,000,000 Times, 250gf Force;
  7. Writing Life: >1,000,000 Times 250gf Force;
  8. Connect Material: FPO+PIN

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light transmission: ≥70%
12. Force: 100g or less
13. Linearity: <3.5%
14. Insulation: ≥20M Ω
15. Surface Hardness: ≥3H (pencil)
16. 未标注公差为±0.2mm

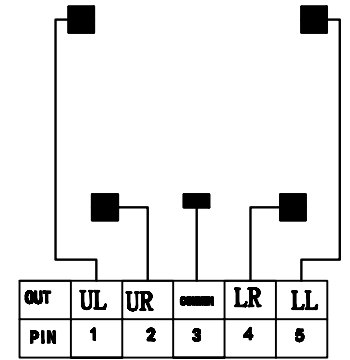

MODEL NO.	GP-101A5K001	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:	15/10/26	SCALE:	1:1
VERSION:	1.0	REV:	