

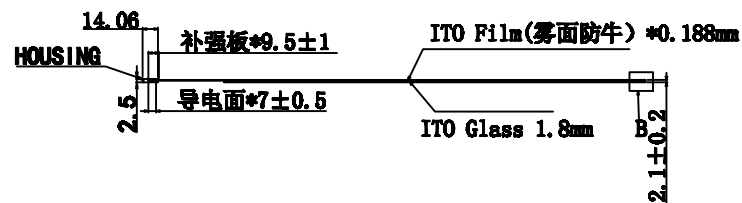


CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	UL
2	UR
3	SG
4	LR
5	LL

Contact Side:



FPC-0C-215单



Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7V
3. Response Time: ≤10ms
4. Storage Temperature: -20°C~+70°C
5. Operation Temperature/Humidity: -10°C~+60°C/20%~95%
6. Hitting Life: >10,000,000 Times. 250gf Force
7. Writting Life: >1,000,000 Times 250gf Force
8. Connect Material: FPC

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light Transmission: ≥78%
12. Force: 100g or less
13. Linearity: ≤3.5%
14. Insulation: ≥20MΩ
15. Surface Hardness ≥3H (pencil)
16. 未标注公差为 ±0.4

MODEL NO.	CP-150A5BC017	UNIT:	MM
DRAWN:		TOLRANCE:	±0.4
DATE:	17-02-23	SCALE:	1:1
VERSION:	1.0	REV:	