




CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	UR
2	UL
3	SG
4	LL
5	LR



DETAIL-C AUTO - + MENU POWER

∅1.5

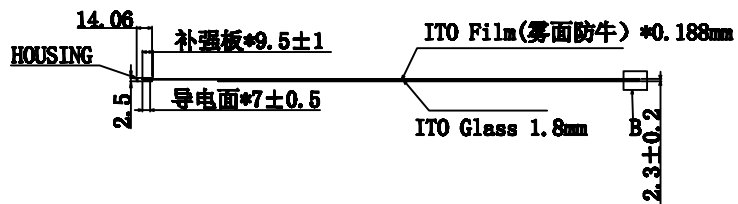

DETAIL-B

Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7V
3. Response Time: ≤10ms
4. Storage Temperature: -20℃~+70℃
5. Operation Temperature/Humidity: -10℃~+60℃/20%~95%
6. Hitting Life: >10,000,000 Times. 250gf Force
7. Writting Life: >1,000,000 Times 250gf Force
8. Connect Material: FPC
9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light Transmission: ≥78%
12. Force: 100g or less
13. Linearity: ≤2.5%
14. Insulation: ≥20MΩ
15. Surface Hardness ≥3H(pencil)
16. 未标注公差为±0.3

MODEL NO.	CP-121A5KC004	UNIT:	MM
DRAWN:		TOLRANCE:	±0.2
DATE:	17-11-25	SCALE:	1:1
VERSION:	1.0	REV:	