
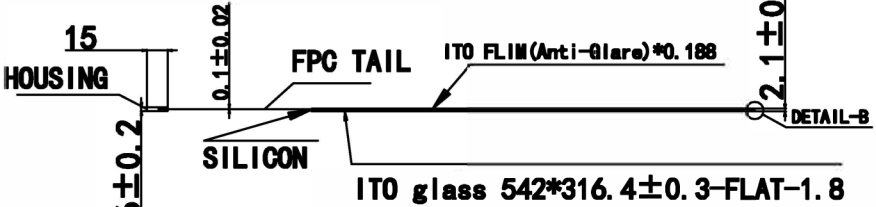
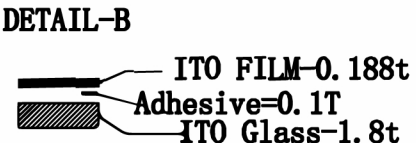



E	F	G
标记(mark)	修改内容(revised contents)	签名(signature) 日期(Date)
1		

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	X1
2	Y1
3	X2
4	Y2



TS057A4K002-127

- Instruction:
- Type: Film to Glass
 - Operating Voltage: 3~7V
 - Response Time: ≤15ms
 - Storage Temperature: -20°C~+50°C/20%~80%
 - Operation Temperature/Humidity: -10°C~+50°C/20%~80%
 - Hitting Life: >10,000,00 Times. 100gf Force
 - Writting Life: >1,000,00 Times. 100gf Force
 - Connect Material: FPC
 - Film Thickness: 0.188mm
 - Glass Thickness: 1.8mm
 - Light Transmission: ≥78%
 - Force: 100g or less
 - Linearity: ≤1.5%
 - Insulation: ≥20MΩ
 - Surface Hardness: ≥3H(pencil)
 - Unmarked tolerance as ±0.5

上海诚普电子科技有限公司				
TITLE: 产品编号	CP-238A4K004		Designed By: 设计	View: 投影方式
CustomerId: 客户编号	Unit: 单位	Date: 日期	Checked By: 审核	Scale: 比例
	mm	19-12-20	Approved By: 批准	1:1