
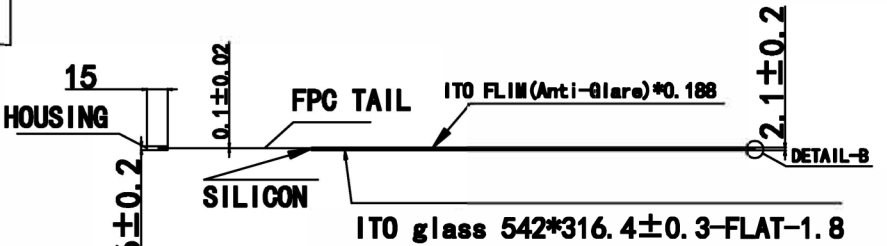
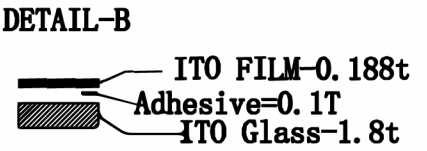



E	F	G
标记(mark)	修改内容(revised contents)	签名(signature) 日期(Date)
1		

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	X1
2	Y1
3	X2
4	Y2



QC004-83.5

- Instruction:
1. Type: Film to Glass
  2. Operating Voltage: 3~7V
  3. Response Time: ≤15ms
  4. Storage Temperature: -20℃~+50℃/20%~80%
  5. Operation Temperature/Humidity: -10℃~+50℃/20%~80%
  6. Hitting Life: >10,000,00 Times. 100gf Force
  7. Writting Life: >1,000,00 Times. 100gf Force
  8. Connect Material: FPC
  9. Film Thickness: 0.188mm
  10. Glass Thickness: 1.8mm
  11. Light Transmission: ≥78%
  12. Force: 100g or less
  13. Linearity: ≤1.5%
  14. Insulation: ≥20MΩ
  15. Surface Hardness: ≥3H(pencil)
  16. Unmarked tolerance as ±0.5

上海诚普电子科技有限公司				
TITLE: 产品编号	CP-238A4K003			
CustomerId: 客户编号	HDR23.8	Designed By: 设计		View: 投影方式
Unit: 单位	mm	Checked By: 审核		
Date: 日期	19-08-01	Approved By: 批准		Scale: 比例
				1:1