
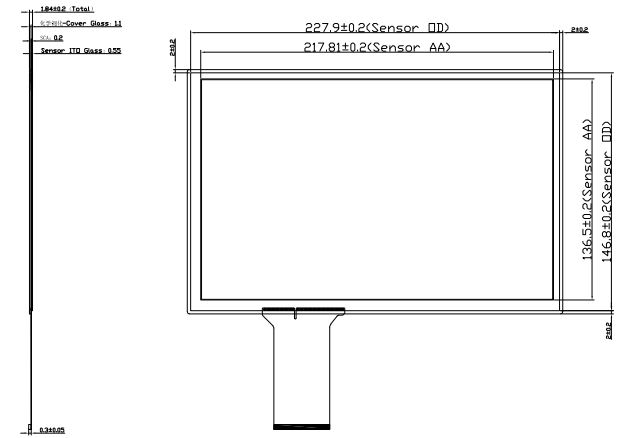


REV	DATE	Content	Approved

正视图 侧视图 背视图

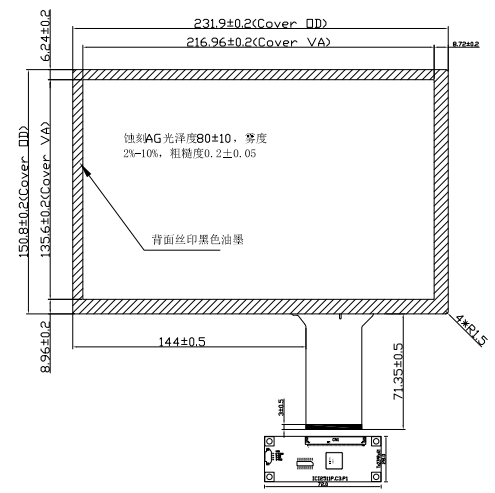

Technical Data:

- G/G Projective Capacitive Touch Panel
- COB 10 Point Multitouch
- Tail Type: Gold Plated FPC, ZIF Connector
- Surface Hardness > 6H
- Cover: Chemical Strengthen Glass
- Cover Glass Thickness: 1.1mm
- Sensor Glass Thickness: 0.55mm
- Total Thickness: 2.9mm
- No. of Channel: Tx*23/Rx*41
- FPC Connector: 68pin; Pitch: 0.5mm
- Operating Temperature: -20°C~+70°C
- Storage Temperature: -30°C~+80°C
- Light Transmittance: 85% up
- Product comply with RoHS
- Optional Control Board: ILI2511(Tx23*Rx41)
- Unit:mm; Unspecified tolerance:±0.2mm
- Detail specification: See Approval Sheet

Pin assignment

CNI	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35
	GND	Tx01	Tx02	Tx03	Tx04	GND	Rx01	Rx02	Rx03	Rx04	Rx05	Rx06	Rx07	Rx08	Rx09	Rx10	Rx11	Rx12	Rx13	Rx14															

- Notes:
- 修改标记
 - 关键尺寸

- 所有材料符合符合RoSH、REACH、无卤标准
- 贴合公差±0.2mm

TP 结构	G+G	透光率	≥85%	接口方式	USB
对应主板	奕力2511	表面硬度	≥6H	显示比例	16:10
工作温度	-20~70°C, ≤85%RH	ESD空气	±12KV	触点数目	10点
存储温度	-30~80°C, ≤85%RH	输入电压	5V		

3RD ANGLE

NOT IN SCALE	NAME	DATE	CUST NO.:LSTP10107-IAB	UNIT:	mm
DRAFTED BY:				Tolerance:	±0.2
CHECKED BY:			Product NO.:LSTP10107-IAB	SCALE:	1:1
APPROVED BY:				SH NO:	1/1