
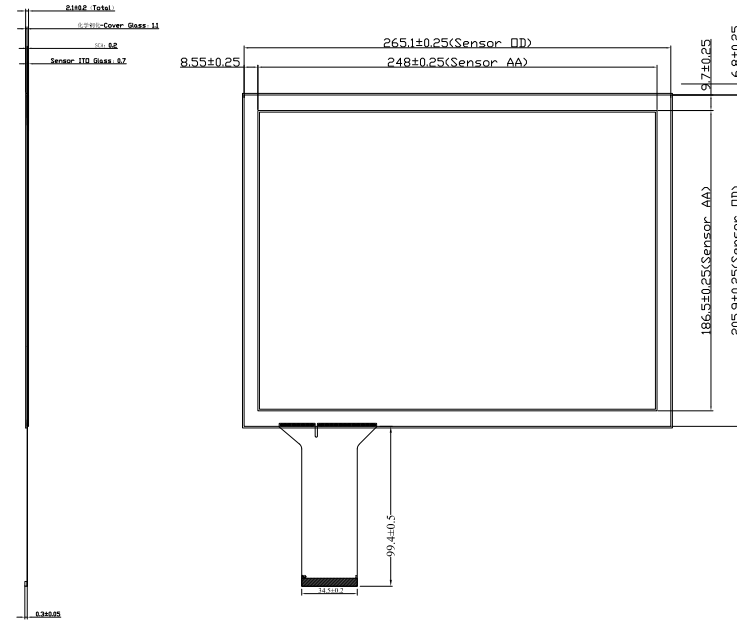


REV	DATE	Content	Approved
V1	2023-04-23	初版发行	zyd

正视图

侧视图

背视图

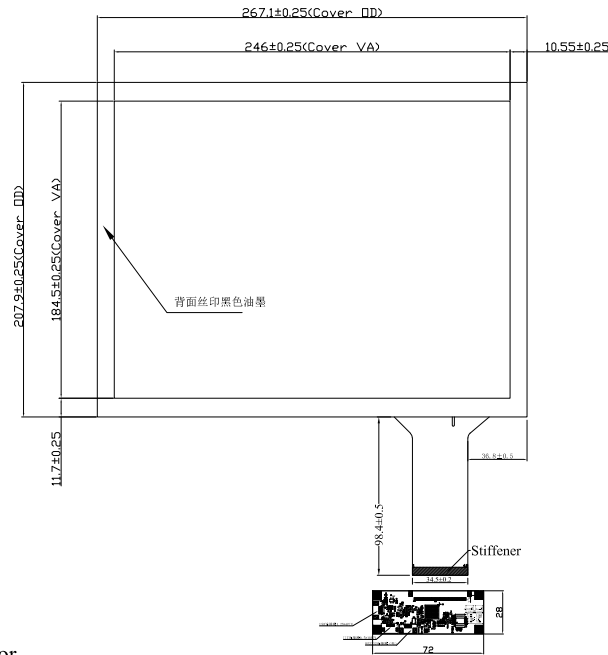

Technical Data:

- G/G Projective Capacitive Touch Panel
- COB 10 Point Multitouch
- Tail Type: Gold Plated FPC, ZIF Connector
- Surface Hardness > 6H
- Cover: Chemical Strengthen Glass
- Cover Glass Thickness: 1.1mm
- Sensor Glass Thickness: 0.7mm
- Total Thickness: 2.3mm
- No. of Channel: Tx\*23/Rx\*41
- FPC Connector: 68pin; Pitch: 0.5mm
- Operating Temperature: -20°C~+70°C
- Storage Temperature: -30°C~+80°C
- Light Transmittance: 85% up
- Product comply with RoHS
- Optional Control Board: EET180W46(Tx23\*Rx41)
- Unit:mm; Unspecified tolerance:±0.25mm
- Detail specification: See Approval Sheet

Notes:

- 修改标记: 关键尺寸: (spc n)
- 所有材料符合符合RoSH、REACH、无卤标准
- 贴台公差±0.2mm

Pin assignment

CN1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	
	GND		Tx20	Rx15	G	Rx35																													
	Tx01		Tx21	Rx16	G	Rx36																													
	Tx02		Tx22	Rx17	G	Rx37																													
	Tx03		Tx23	Rx18	G	Rx38																													
	Tx04		GND	Rx19	G	Rx39																													
	Tx05		GND	Rx20	G	Rx40																													
	Tx06		Rx01	Rx21	G	Rx41																													
	Tx07		Rx02	Rx22	G	GND																													
	Tx08		Rx03	Rx23																															
	Tx09			Rx04		Rx24																													
	Tx10			Rx05		Rx25																													
	Tx11			Rx06		Rx26																													
	Tx12			Rx07		Rx27																													
	Tx13			Rx08		Rx28																													
	Tx14			Rx09		Rx29																													
	Tx15			Rx10		Rx30																													
	Tx16			Rx11		Rx31																													
	Tx17			Rx12		Rx32																													
	Tx18			Rx13		Rx33																													
	Tx19			Rx14		Rx34																													

	NOT IN SCALE		NAME	DATE	CUST NO.: LSTP12153-EAB	UNIT: mm
	DRAFTED BY: zyd		2023/04/23			Tolerance: ±0.25
	CHECKED BY:				Product NO.: LSTP12153-EAB	SCALE: 1:1
	APPROVED BY:					SH NO: 1/1

TP 结构	G+G	透光率	≥85%	接口方式	USB
对应主板	EET180W46	表面硬度	≥6H	显示比例	4:3
工作温度	-20~70°C, ≤85%RH	ESD空气	±12KV	触点数目	10点
存储温度	-30~80°C, ≤85%RH	输入电压	5V		