
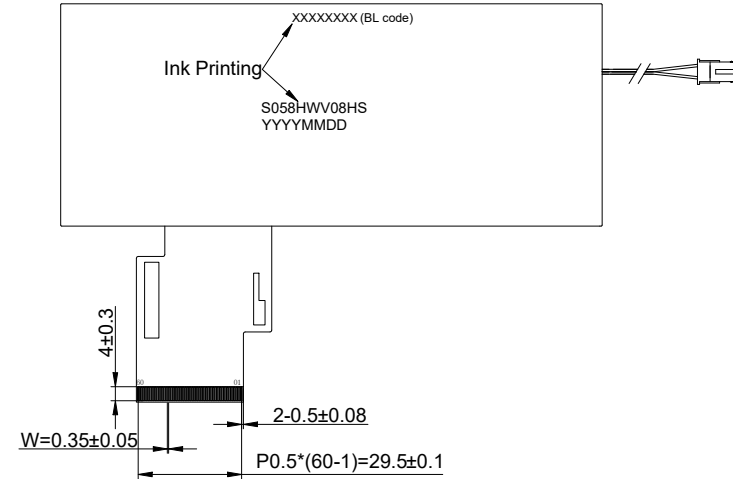
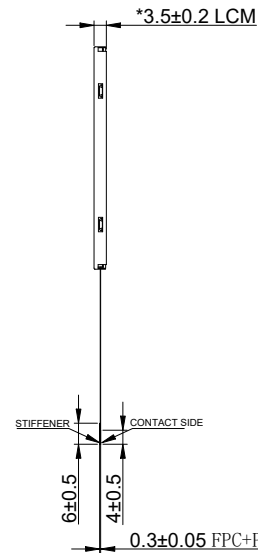


Front View


Side View

Rear View

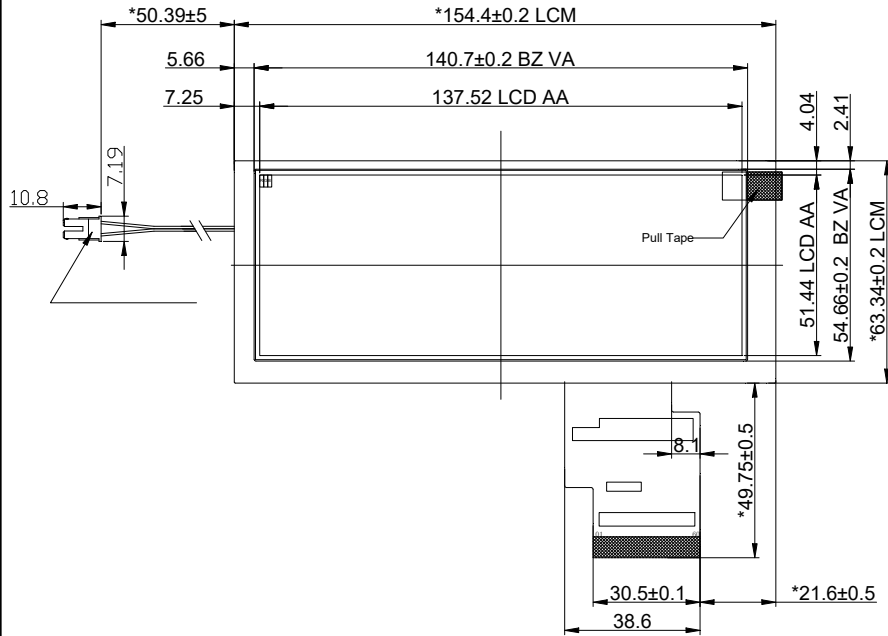

LCM PIN

PIN	SYMBOL
1	AGND
2	AVDD
3	DVDD
4	R0
5	R1
6	R2
7	R3
8	R4
9	R5
10	R6
11	R7
12	G0
13	G1
14	G2
15	G3
16	G4
17	G5
18	G6
19	G7
20	B0
21	B1
22	B2
23	B3
24	B4
25	B5
26	B6
27	B7
28	DCLK
29	DE
30	HSD
31	VSD
32	MODE
33	RSTB
34	STBYB
35	SHLR
36	DVDD
37	UPDN
38	GND
39	AGND
40	AVDD
41	VCOM
42	DITH
43	NC
44	NC
45	V10
46	V9
47	V8
48	V7
49	V6
50	V5
51	V4
52	V3
53	V2
54	V1
55	NC
56	VDDG
57	DVDD
58	VEEG
59	GND
60	NC



- LCM NOTES:  
 1. DISPLAY TYPE: 5.8 INCH TFT /TRANSMISSIVE  
 2. BACKLIGHT: 24 CHIP WHITE LED, 3S8P  
 IF = 8.1~10.2V;VF = 160mA  
 3. OPERATING TEMP: -20°C~+70°C  
 4. STORAGE TEMP: -30°C~+80°C  
 5. LCD IC:-  
 6.Luminance:500cd/m2(TYP)  
 7. "( )"reference dimension,"\*"critical dimension  
 8. RoHS Compliant

REV.	DATE	MODIFICATION
1.0	2022.08.02	First issue

INTERFACE	VIEWING DIRECTION	Gray DIRECTION
RGB Interface	12 O'clock	6 O'clock
FPC Connector (FH12-60S-0.5SH)		

**CDTECH** 深圳市思迪科科技有限公司  
 SHENZHEN CDTECH ELECTRONICS

File NO:	PART NO.
DWN Li Huang 2022.08.02	S058HWV08HS
CHKD LHF 2022.08.02	REV. 1.0 SHEET OF 1/1
PROJECTION 3rd ANGLE	TOLERANCE UNLESS SPECIFIED ±0.2
UNIT mm	SCALE 1:1